



PRODUCT DATA SHEET

CEILING SYSTEM ZENITH AIR



ZENITH AIR

The simple design of the ZENITH AIR ceiling system offers extremely simple lay in installation and 100% access to the plenum space. With various standard and custom mesh and expanded metal patterns available, the ZENITH AIR can be made with any open area or cell size desired.

FEATURES

- Comes in standard 2'x2' or 2'x4' panels
- Visible suspension
- Unlimited access
- Different textures and colors available

BENEFITS

- Easy installation and replacement of panels
- No hassle
- Cost-saving labor
- 100% accessible


ACOUSTICAL MEDIA

- Non-woven acoustical fabric
- Fiberglass acoustical media encased in black poly or PVC

FIRE RATING

All metal ceiling panels and associated suspension systems are made entirely of noncombustible materials and meet all known code requirements.

TYPICAL ISOMETRICS & SECTIONS

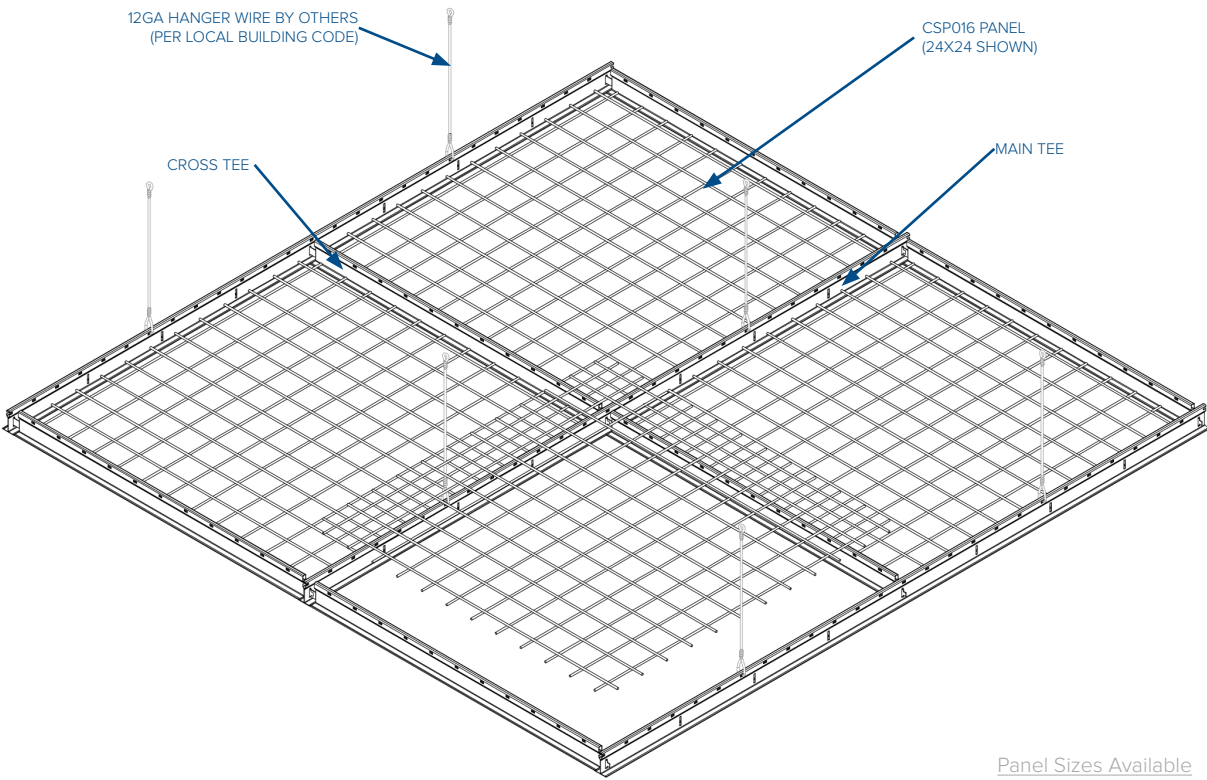

Panel Sizes Available
2' x 2'
2' x 4'
Custom sizes available

ALUMINUM

Material type 3003-H14 (painted and laminated finish) or 5005-H14/32 (anodized finish) to comply with ASTM B-209
Thickness: 0.032" to 0.050"

STAINLESS STEEL

Material type 304 or 316 to comply with ASTM A-240
Thickness: 0.022" to 0.032"

STEEL

Material to comply with ASTM 653 / A653M
Thickness: 0.022" to 0.032"

CEILING SYSTEM ZENITH AIR

COLORS & FINISHES

A wide variety of colors and finishes are available. Options shown below are for illustration purposes only. Custom finishes are available on request. Minimum orders and associated lead times may apply to custom options.

ALUMINUM




Anodized



Brushed



Polyester
powder coat



Pre-painted or
post-painted




Duranar or Kynar




Enamel paint

STEEL


Galvanized or satin coat



Polyester
powder coat



Post painted
Kynar 500



Standard plated
finishes



Specialty plated
finishes

www.carritec.com

info@carritec.com

575 Boul Morgan, Baie-d'Urfé, QC H9X 3T6

514 457 7779 | 800 610 0179 | 514 457 5559