




PRODUCT DATA SHEET

CEILING SYSTEM STRATUM FREE

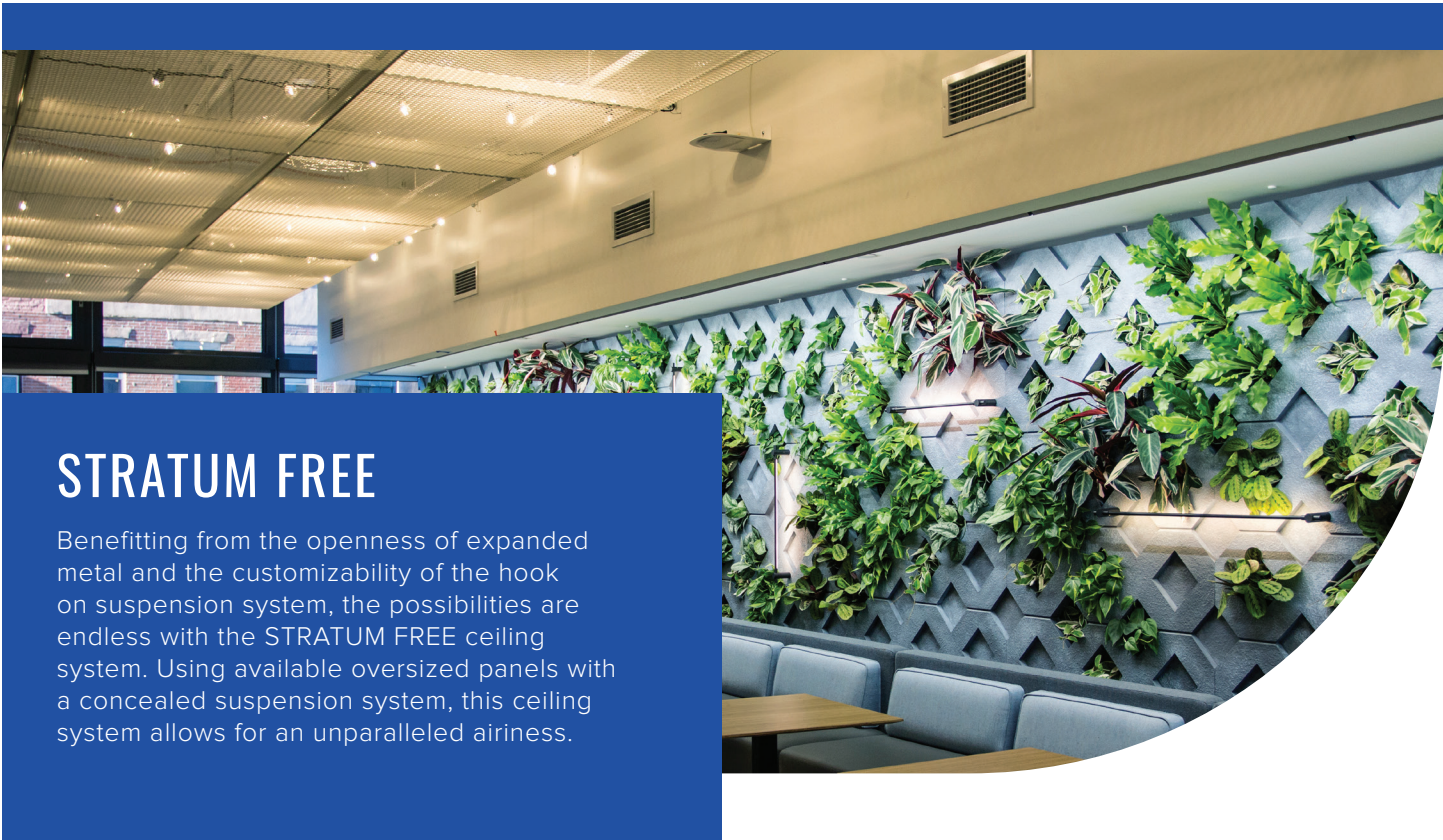

STRATUM FREE

Benefitting from the openness of expanded metal and the customizability of the hook on suspension system, the possibilities are endless with the STRATUM FREE ceiling system. Using available oversized panels with a concealed suspension system, this ceiling system allows for an unparalleled airiness.

FEATURES

- Large panel sizes with less suspension
- Easy hook on attachment
- Concealed suspension
- Different textures and colors available

BENEFITS

- Easy installation and replacement of panels
- Flexible in design and function
- Cost-saving labor
- 100% accessible


ACOUSTICAL MEDIA

- Non-woven acoustical fabric
- Fiberglass acoustical media encased in black poly or PVC

FIRE RATING

All metal ceiling panels and associated suspension systems are made entirely of noncombustible materials and meet all known code requirements.

TYPICAL ISOMETRICS & SECTIONS

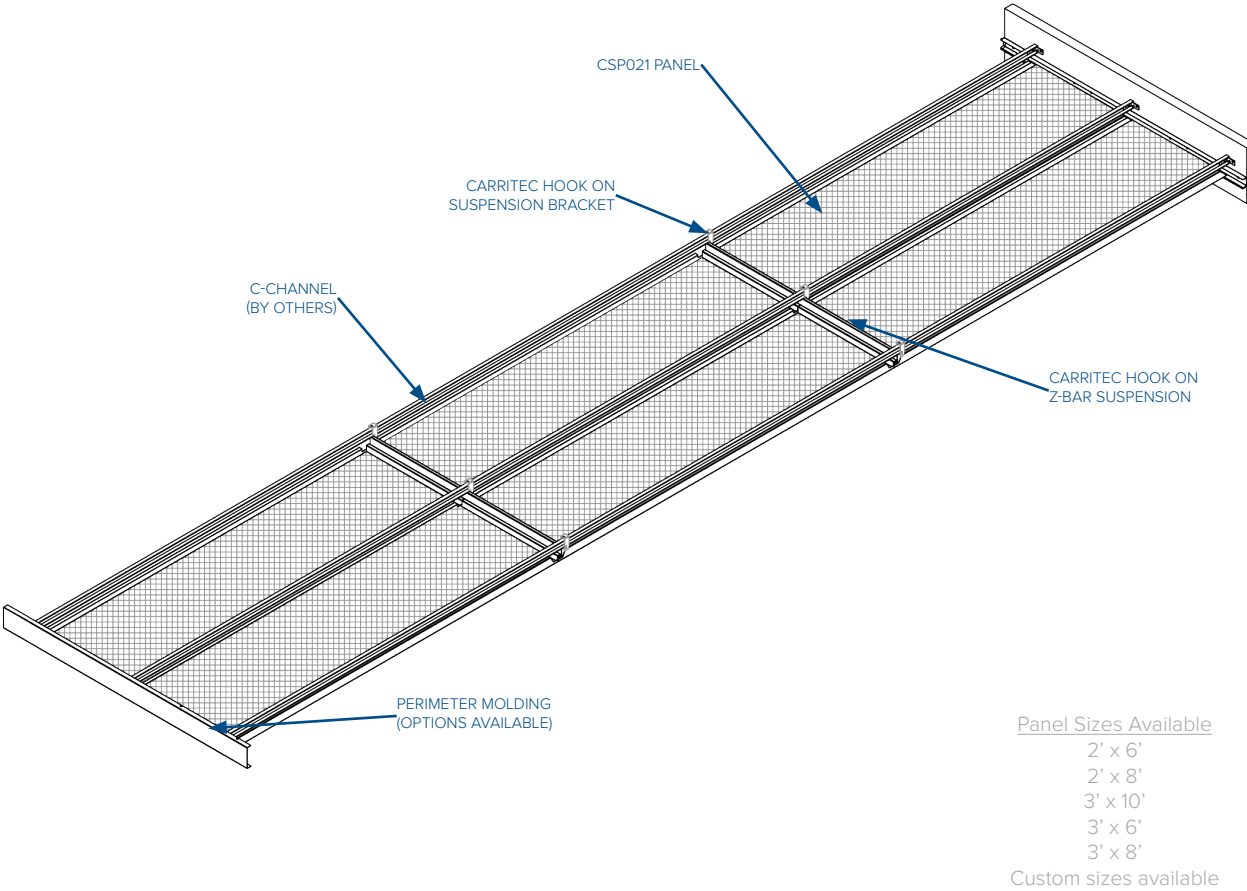

ALUMINUM

Material to comply with ASTM B 209, alloy and temper recommended by aluminum producer and finish requested, with strength and durability equal to or greater than the properties of the 3003-H14 for painted or laminated finishes and 5005-H14/32 for anodized finish.

Thickness: 0.032" to 0.080"

STEEL

Material to comply with ASTM 653 / A653M

Thickness: 0.022" to 0.062"

CEILING SYSTEM STRATUM FREE

COLORS & FINISHES

A wide variety of colors and finishes are available. Options shown below are for illustration purposes only. Custom finishes are available on request. Minimum orders and associated lead times may apply to custom options.

ALUMINUM




Anodized



Brushed



Polyester
powder coat



Pre-painted or
post-painted




Duranar or Kynar




Enamel paint

STEEL


Galvanized or satin coat



Polyester
powder coat



Post painted
Kynar 500



Standard plated
finishes



Specialty plated
finishes

www.carritec.com

info@carritec.com

575 Boul Morgan, Baie-d'Urfé, QC H9X 3T6

514 457 7779 | 800 610 0179 | 514 457 5559